

CYLINDERS



OXYGEN
LO-20
20 cu. ft.
Oxygen

LO-40
40 cu. ft.
Oxygen



ACETYLENE
LM-10
MC-Acetylene
(10 cu. ft.)

LB-40
B-Acetylene
(40 cu. ft.)

DISPOSABLE CYLINDERS



QLP
Propane Fuel Cylinder

Net wt.: 14.1 oz.
(400 gm.)

Disposable steel cylinder. Fits most standard propane torches and other propane appliances.




QLM
MAP-Pro™ Cylinder

Net wt.: 14.1 oz.
(400 gm.)

Disposable steel cylinder containing a composition of Propylene.

Cylinders meet DOT specifications.

ACCESSORIES

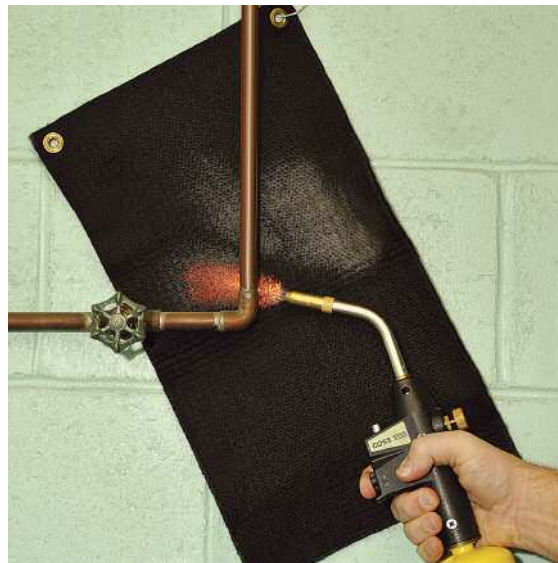

MP-21
Flame Shield
Size: 10" x 18"

Asbestos free material helps protect walls, joints and studs from flame and spark damage.

MP-22
Leak Detector Fluid
4 oz. Squeeze Bottle

Leak Detector – provides an easy and efficient method of leak detection.

- Safe for all gases and oxygen
- Non-flammable and non-corrosive
- Forms a readily visible and stable foam
- Flip top cap provides easy application



MA-2
Wrench
Wrench for "B" and "MC" Acetylene cylinders.



MP-4
Wrench
Multi-size wrench.



MP-37-A
Tip Cleaner



MP-35
Welding Goggles
Over-the-glasses style.



MP-10
Torch Stand
Supports torch to eliminate relighting and prevents the hot tip from touching the work surface. Fits EX style extensions.



MP-1
Lighter
Single flint lighter.
(Flint included.)



MP-20XC
Lighter
MP-1 lighter with MP-2-5 flints packaged for display.



MP-2-5
Flints
Holder of 5 flints for MP-1 lighter.



MP-6
Lighter
Triple flint lighter.



MP-7
Flint
Triple flint.


KEY: B Refers to 9/16 – 18 Threads
A Refers to 3/8 – 24 Threads

LH Refers to Left Hand Threads
RH Refers To Right Hand Threads

M Refers to Male Threads
F Refers to Female Threads

Oxygen Has Right Hand Threads
Fuel Gas Has Left Hand Threads

PIG TAILS

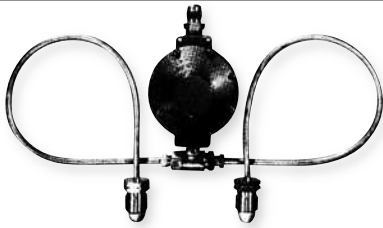

- IP-7** POL by Inverted Flare 20" long.
- IP-8** POL by Inverted Flare 30" long.
- EP-3-4B** 1/4" Flare Tee Block only.

Y-OUTLET



- IP-3** 9/16" – 18 LH fittings.
Connects to outlet of regulator.


SURE GAUGES



- MP-39-B** for B cylinders.
 - MP-39-MC** for MC cylinders.
 - MP-39-N** for nitrogen cylinders.
 - MP-39-O** for oxygen cylinders.
- Used to determine tank contents.


COUPLERS & ADAPTERS

POL cylinder connection x 9/16" – 18 LHM hose fitting.




- IP-2 Adapter**
Propane tank to hose.
Includes built-in excess flow valve.

POL male to 2 POL females.




- 6001 T-Coupler**
Adapts POL cylinder to two POL regulators or manifolds.

1" - 20m THD x POL.




- BRS-913 Adapter**
Adapts the EP-20 BR to POL fitting that is used on refillable cylinders.

1" 20m x 9/16" – 18 LHM hose fitting.



- BRS-461 Adapter**
Enables hand torches that connect to disposable tanks to be connected to a hose.

TIP TO HANDLE ADAPTERS



- BRS-770**
Adapts snap-in tips to torch handles with screw-in design.



- BRS-665**
Adapts the Goss variety of Pencil, Brush or Target® Tips to torch handles with snap-in design.




- BRS-986**
Converts TW-5A and TW-10A oxy/fuel torch to snap-in air/fuel tips.



- BRS-700**
Converts TW-5A and TW-10A oxy/fuel torch to screw-in air/fuel tips.


TORCH OR REGULATOR TO HOSE ADAPTERS

- BRS-339** (B) LHF to (A) LHM
- BRS-340** (B) RHF to (A) RHM
- BRS-341** (A) LHF to (B) LHM
- BRS-342** (A) RHF to (B) RHM
- BRS-707** (B) LHF to 1/4 NPT-F



HOSE TO HOSE ADAPTERS

- BRS-314** "A" Fitting to "A" Fitting (Oxygen)
- BRS-315** "A" Fitting to "B" Fitting (Fuel Gas)
- BRS-316** "A" Fitting to "B" Fitting (Oxygen)
- BRS-317** "A" Fitting to "A" Fitting (Fuel Gas)
- BRS-318** "B" Fitting to "B" Fitting (Oxygen)
- BRS-319** "B" Fitting to "B" Fitting (Fuel Gas)



QUICK CONNECT ADAPTER



- BRS-776**
Snap Together



- BRS-776M**



- BRS-776F**

BRS-776 Quick Change Adapter

- High flow design
- Made of brass & aluminum
- UL Listed
- Connects torch to hose

TORCH NUT

- No. 2303**
Fits TCA-10 Cutting Attachment.




CYLINDER TO REGULATOR ADAPTERS



- BRS-362**
POL Reg. to Comm. Cyl.



- BRS-363**
POL Cyl. to Comm. Reg.



- BRS-364**
B Reg. to MC Cyl.



- BRS-365**
B Cyl. to MC Reg.